

OVERTONE

OFFSET



Since its inception in 1985, the Welspun Group has been committed to making India proud globally through its superior quality and innovative products and services. Its brilliant addition, Welspun Flooring, now has a modern manufacturing facility spread over an impressive 300 acres with an investment of more than ₹1150 cr.


A breakthrough in engineering and design, Welspun Flooring brings you a unique meeting of form and function in each collection. This distinctive quality appeals to Architects, Designers, Retailers and Consumers, offering them holistic flooring solutions that spur creative thinking and an elevated sense of design.

OVERTONE OFFSET

Overtone is an homage to textures that hugely affects the overall feel of a space, in the same way warm and cool colours do. Rough textures can make a space feel intimate, rustic and grounded, while smoother surfaces tend to add a modern, sleek and contemporary tone to a space.



GAINBORO | CT001683

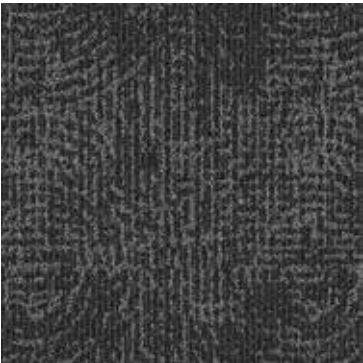

LEAD GRAY | CT001687



TAUPE | CT001689



SILVER | CT001684



BEAVER | CT001688



CANVAS | CT001690




DIM GRAY | CT001685



CHESTNUT | CT001691




TUFF | CT001693

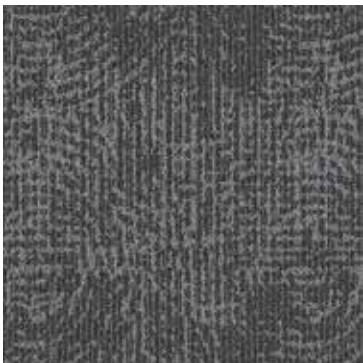


SLATE GRAY | CT001686




UMBER | CT001692






GAINBORO | CT001683

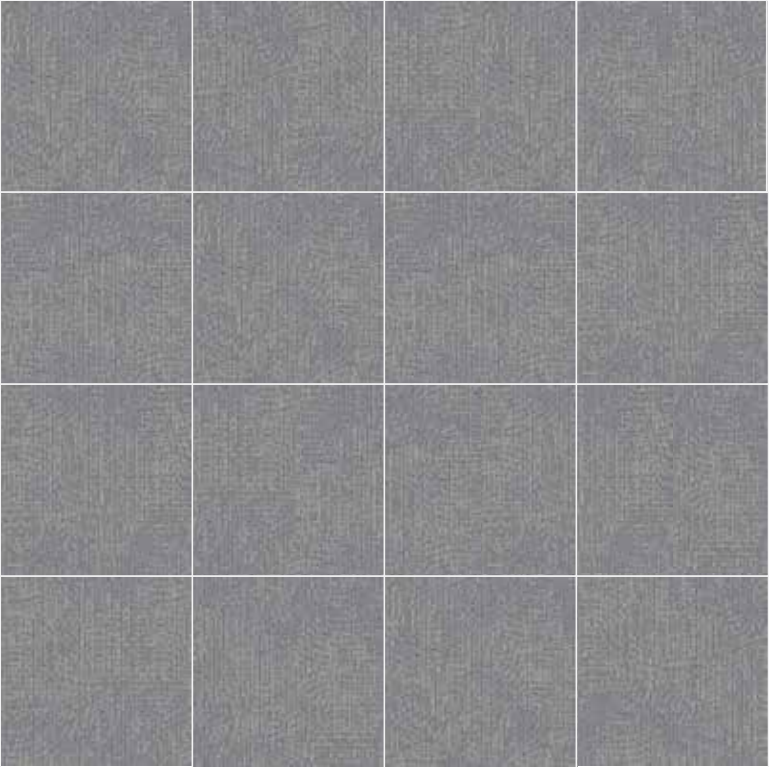






SILVER | CT001684

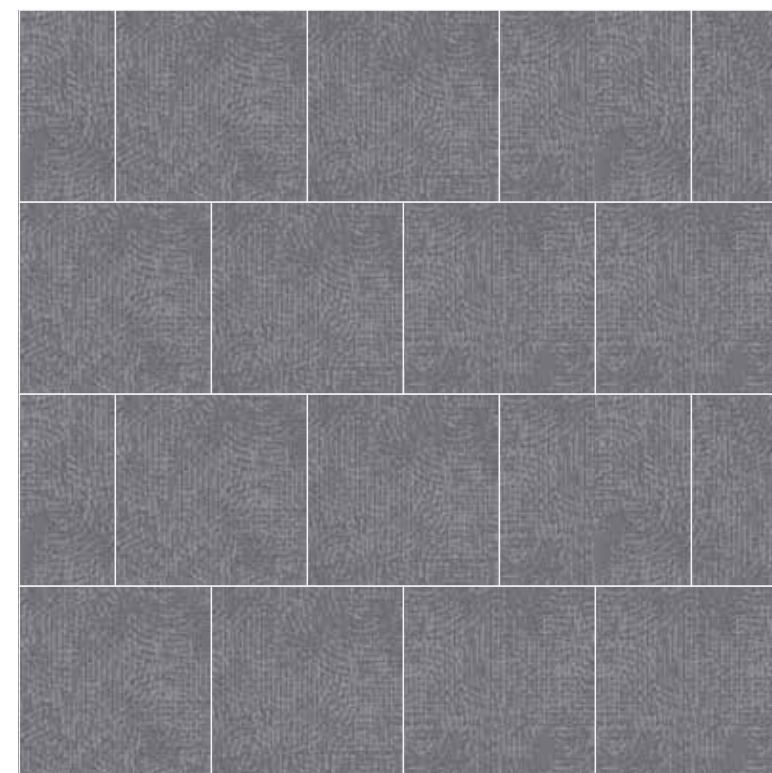

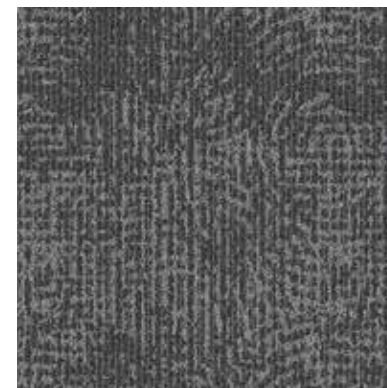



SLATE GRAY | CT001686

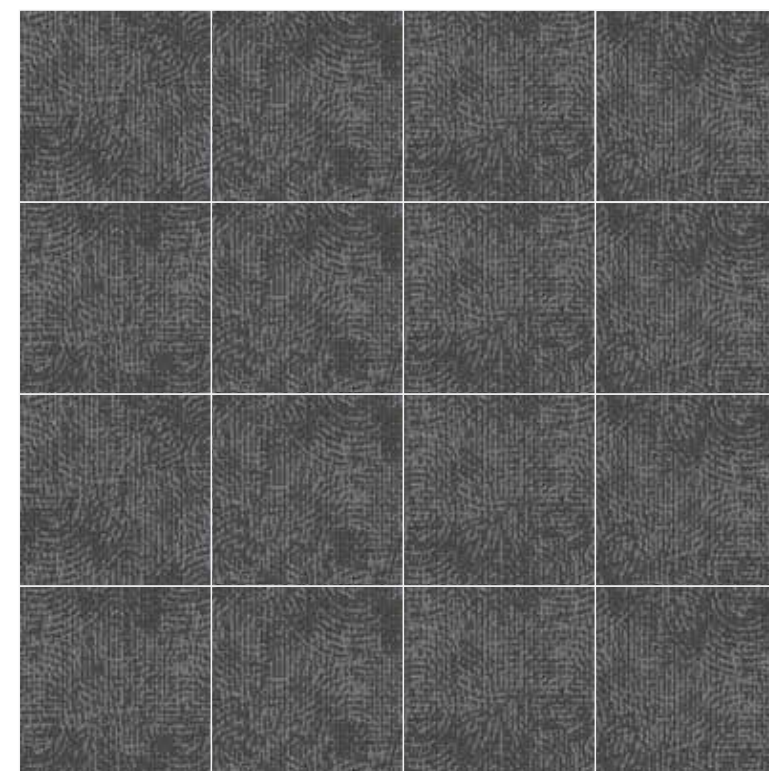

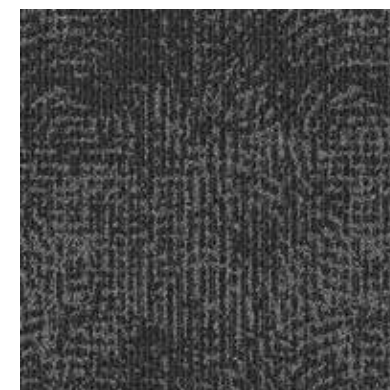



LEAD GRAY | CT001687

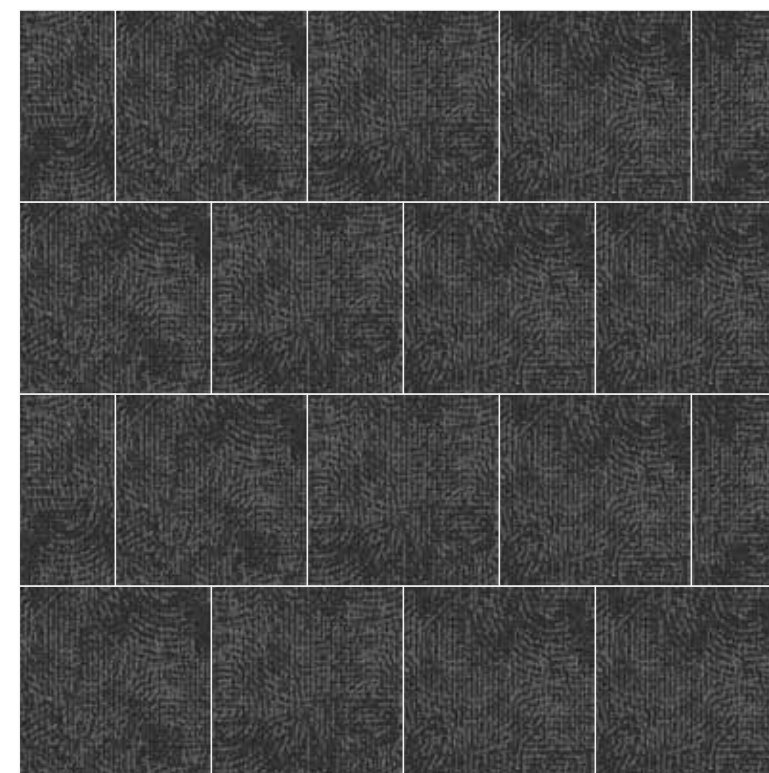





BEAVER | CT001688

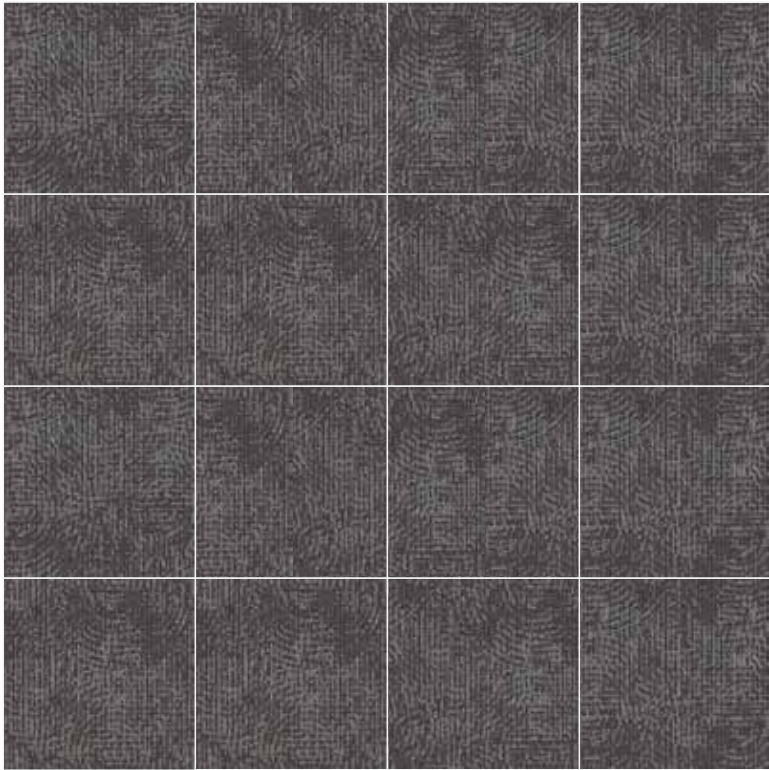




TAUPE | CT001689

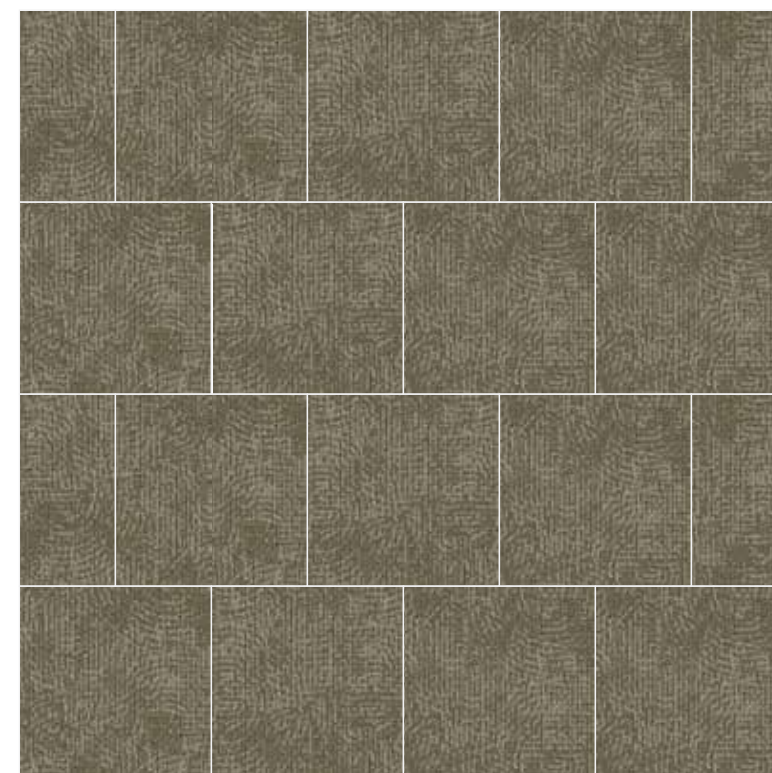






CANVAS | CT001690








CHESTNUT | CT001691

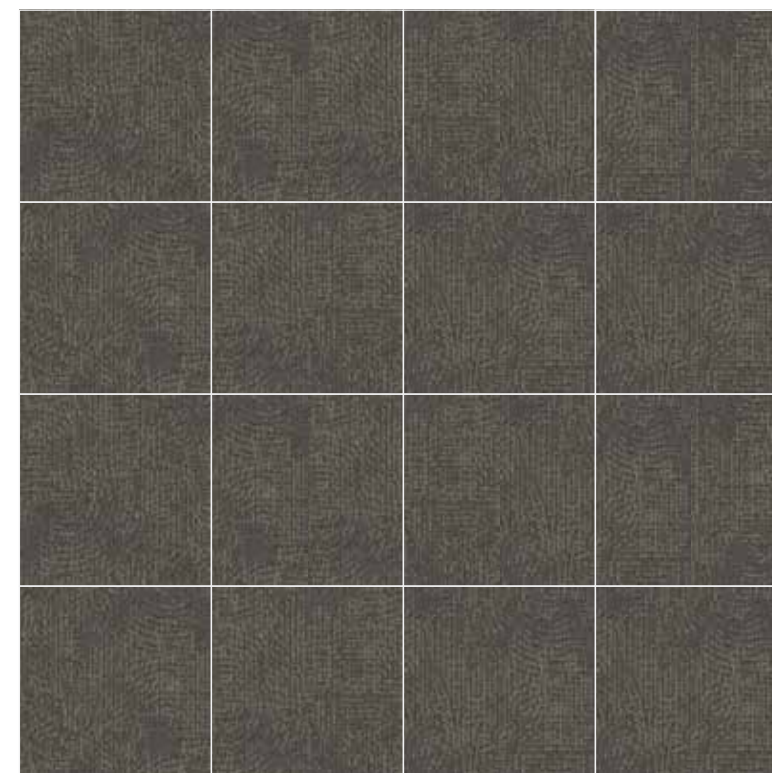

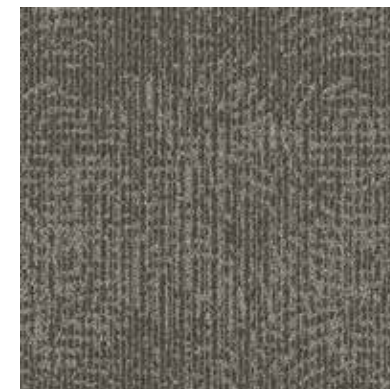


UMBER | CT001692

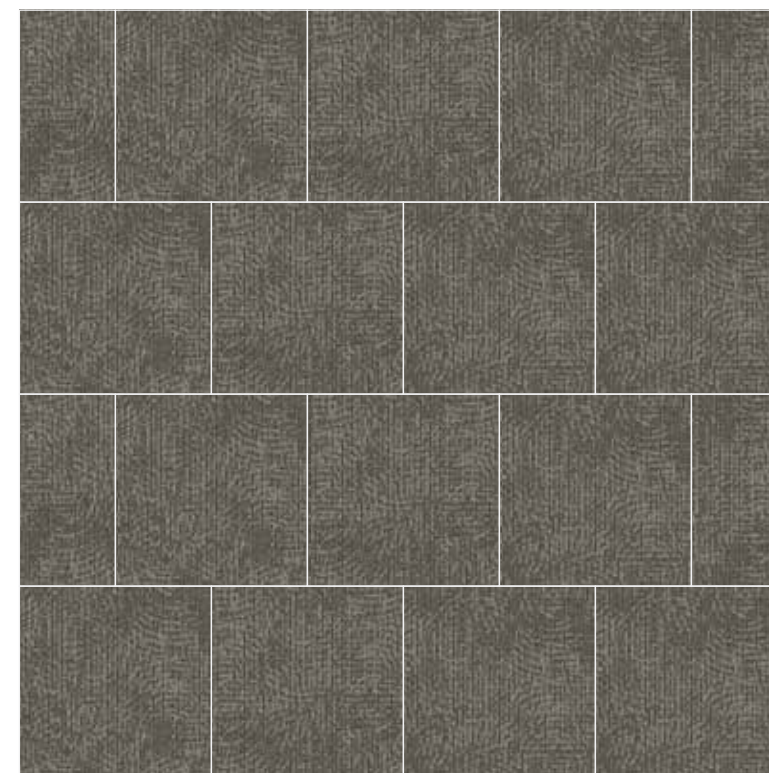

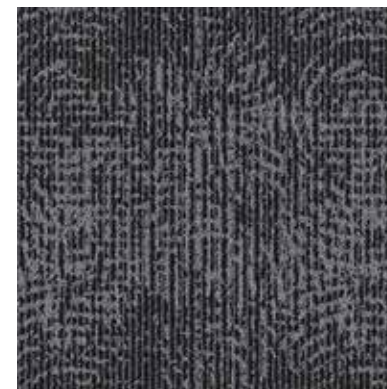

TUFF | CT001693

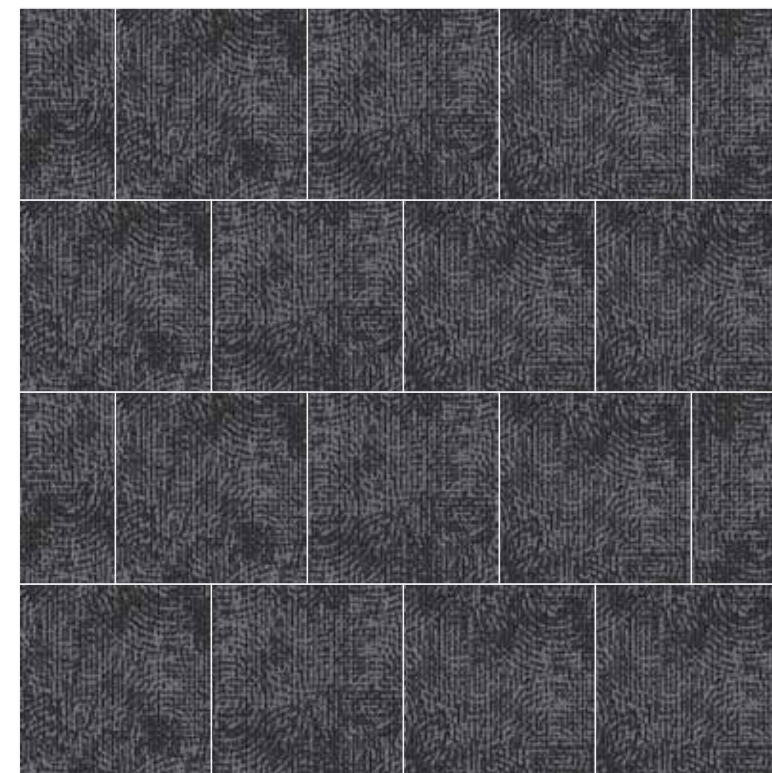

CARPET TILES
ADVANTAGES



Solution Dyed
Nylon



Multiple Design
Possibilities



Ideal For Heavy
Foot Traffic



Stain
Protect



40% Lesser
Environment
Footprint



Fade
Resistant



Less
Lead Time



Easy To
Maintain



Offers Sound
Absorption



Easy To
Install



Reduce Wastage
During Installation



Made in
India

TRADEMARKS
& TECHNOLOGIES



Welspun Ecolite™

Welspun Ecolite™ backing are made up of lightweight PVC that not only reduces the overall weight significantly but ensures a 40% less environment footprint than traditional carpets. Despite that, this backing retains the highest performance standards.



Now also available with Healthy Floor™ (Optional)

We also have carpet tiles options with antiviral property. Tested and certified by ResInnova labs, we are India's first antiviral carpet tiles. It kills 99.68 % human corona virus because of a special coating of silver iron & titanium oxide. We make healthy floors.



Comfortile™ (Optional)

With Comfortile™ backing, our tiles come with a customized felt-back that not only offers great underfoot comfort but also sound absorption. Comfortile™ provides extra levels of protection and support for high levels of acoustic and ergonomic support.



NY6+™

For colors that don't fade out, Welspun Floorings Ny6+™ is made up of a highly resilient fiber that is known for its superior colour retention, strength, stain and fade resistance. With all this, your floor always retains it's beauty come what may.

PRODUCT SPECIFICATION

Collection/Design	Overtone/Offset
Machine/Gauge	1/12 Loop Infinity
Yarn	Nylon 6
Size (CM)	50X50
Pile Height (mm)	3.5-4.5
Total Thickness (mm)	5.5-6.0
Density	5200-5500
SPI	10
Tufting Weight (Oz)	18
Backing System	Welspun Ecolite or Comfortile
Indicates	+/-5%

TEST REPORT SUMMARY

Test Name	Method	Test Name	Method
Anti Microbial Treatment	AATCC 174 (Part II & III)	Colour fastness to bleach	AATCC 6
Delamination	ASTM D 3936	Static Electricity	AATCC 134-1996
Tuft Bind	ASTM 1335-67	Anti Static	ANSI/ESD S 7.1
Dimensional stability	ASTM D 7570	Castor Chair	DIN 54324
Pile weight	ASTM D 5848-07	Hexapod	ASTM D 5252-15
Pile density	ASTM D 5848-07	Static Coefficient	ASTM C 1028
Total thickness	ASTM D 6988-08	Dimensional stability (Aachen test)	DIN-STD-54318/ITTS-004
Pile height	ASTM D 5823-05a	Anti Soil	ASTM D 6540-05
Gauge	ASTM D 5793-13	Shampoo Fastness	AATCC 138
Tuft density	ASTM D 5848	Water Fastness	AATCC 107
Flammability (Pill Test)	ASTM D 2859	Velcro-Loops	ITTS 112
Flammability (Radiant Panel)	ASTM E 648-06	Heavy Traffic test (Walk test)	ASTM 6119-03
NBS Smoke Density (Flaming)	ASTM E 662-06	Sound transmission	ASTM C 423-17
Lightfastness	AATCC 16 E	Sound Absorption	ASTM C 423-17
Colour fastness to Ozone	AATCC 129	Static Loading	ISO 015/3415
Colour fastness to NO ₂	AATCC 164-2008	Green Carpet (VOC)	ASTM D 5116
Crocking Dry and Wet	AATCC 165-2008	Acoustic	BS EN ISO 354
Stain fastness	AATCC 175-2008/ITTS 002	Thermal Resistance	ASTM C 518

CERTIFICATION





WELSPUN GLOBAL BRAND LTD,
SURVEY NO. 190, CHANDANVELLY, NEAR HYTHABAD,
SHABAD MANDAL, RANGA REDDY (DIST),
TELANGANA 501 503
INDIA

Contact us:

1800 - 120 - 1161

India: contact_flooring@welspun.com

Global: global_saleswfl@welspun.com

www.welspunflooring.com



Scan the QR code to explore
Overtone - Offset collection